www.npp-power.com.cn

NPP
CLEAN ENERGY, SAFE POWER

Standard | AGM | UPS | Security | IT equipment | Medical Equipment

NP12-65Ah

Valve-regulated lead-acid battery



GENERAL PURPOSE SERIES


Characteristics

Nominal voltage		12V (6 cells per unit)
Nominal capacity at 10 hours rate/10.8V (25°C)		65Ah
Capacity (25°C)	3 Hours rate/10.8V	48Ah
	1 Hour rate/10.5V	36Ah
Terminal type		T14
Torque		5.1±0.6N.m
Approx. internal resistance (25°C)		6.5mΩ
Dimensions	Length	350±2mm (13.78inch)
	Width	166±2mm (6.54inch)
	Height	179±2mm (7.05inch)
	Total height (T14)	179±2mm (7.05inch)
Design Life (stand-by)	JIS at 25°C	10 years
	Eurobat at 20°C	10/12 years
Weight		20.40kg (45.00lbs)±3%
Nominal operating temperature		25°C±3 (77±5°F)
Operating temperature range	Discharge	-15°C~50°C (5°F~122°F)
	Charge	-10°C~50°C (14°F~122°F)
	Storage	-20°C~50°C (-4°F~122°F)
Float charging voltage at 25°C		13.5V~13.8V
Cyclic charging voltage at 25°C		14.5V~15.0V
Temperature compensation	Float charge	-18 mV/°C/Block
	Cycle charge	-30 mV/°C/Block
Max. charging current (A)		19.5A
Max. discharge current for 5 seconds		650A
Self discharge rate (25°C)		≤3%/month
Battery container ABS UL94-HB		V-0 optional

Overview

NPP Power General Purpose series batteries are designed with state-of-the-art AGM (absorbent glass mat) technology, high-performance plates and electrolyte. With excellent value and characteristics, this range is suitable for all general purpose applications.

Dimensions & Terminal Type (mm)

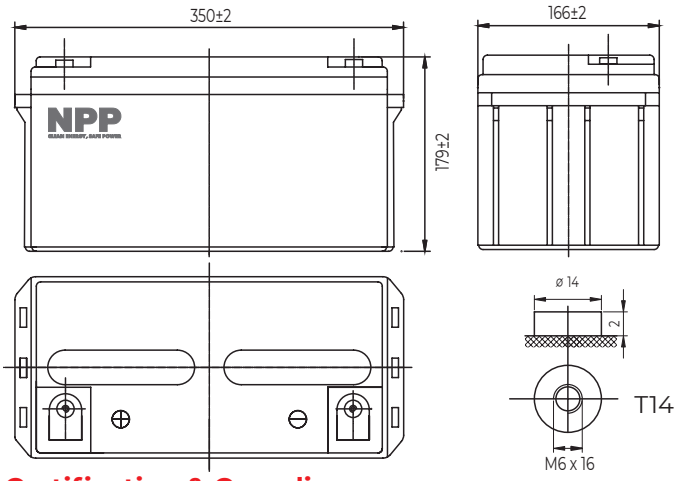

Certification & Compliances

ISO 9001 | ISO 14001 | OHSAS 18001 | UL | IEC | CQC | TLC

Compliant to: EUROBAT, RoHS, WEEE's and Reach.
Manufactured according to IEC 60896-21 / 22

Construction

Component	Positive Plate	Negative plate	Container	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS	AGM	Sulfuric Acid	Rubber	Copper

Constant current discharge characteristics at 25°C

(Ampere/battery)

F.V/Time	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	142	109	65.3	40.2	23.8	17.1	13.7	11.7	8.02	6.62	3.51
9.90V	137	107	64.0	39.6	23.6	17.0	13.6	11.6	7.98	6.60	3.50
10.2V	132	103	62.1	38.6	23.4	16.9	13.5	11.5	7.92	6.58	3.49
10.5V	126	99.2	60.6	37.4	23.0	16.8	13.4	11.4	7.87	6.55	3.47
10.8V	119	93.9	58.3	36.2	22.5	16.3	13.0	11.1	7.63	6.50	3.45

Constant power discharge characteristics at 25°C

(Watts/battery)

F.V/Time	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	1530	1199	733	458	275	201	161	138	95.3	79.0	42.1
9.90V	1484	1170	718	451	273	200	160	137	94.7	78.9	42.0
10.2V	1423	1127	696	440	271	199	159	136	94.1	78.6	41.9
10.5V	1362	1089	679	426	267	197	157	135	93.4	78.2	41.6
10.8V	1286	1031	655	412	260	191	153	131	90.6	77.6	41.3

The above characteristics represent average values and can be obtained within three charge and discharge cycles. The batteries must be fully charged before testing. The data in this document is subject to change without notice and become contractual only after written confirmation. Please contact NPP Power for the latest available version.

NPP Power (Vietnam) Co., Ltd.
Lot A22.3, Road C4, Thanh Thanh Cong Industrial Zone,
An Hoa Ward, Trang Bang Town, Tay Ninh Province,
Vietnam

Guangzhou NPP Power Co., Ltd.
No.67 Lianglong Road, Huashan Town, Huadu District,
Guangzhou, China
Email: info@nppower.com.cn Tel. +86 20 37887 390

Copyright © 2022 Guangzhou NPP Power Co., Ltd. All rights reserved.

Rev. 240622CN-KK


NP12-65Ah

Valve-regulated lead-acid battery


GENERAL PURPOSE

SERIES


Discharge characteristics (25°C)

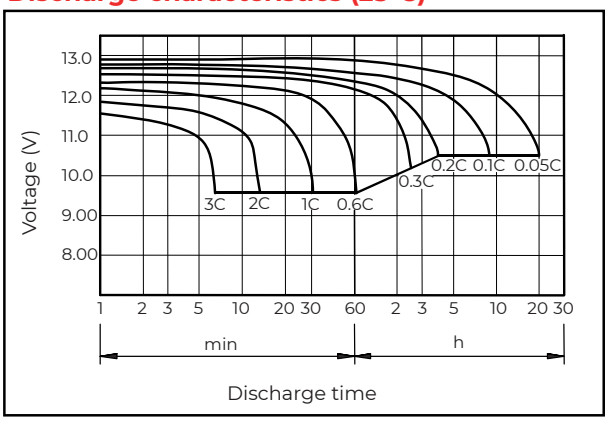


Charging characteristics (25°C)

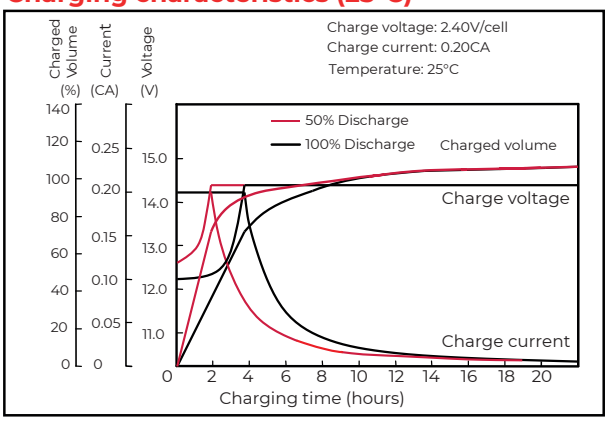


Temperature effects on capacity

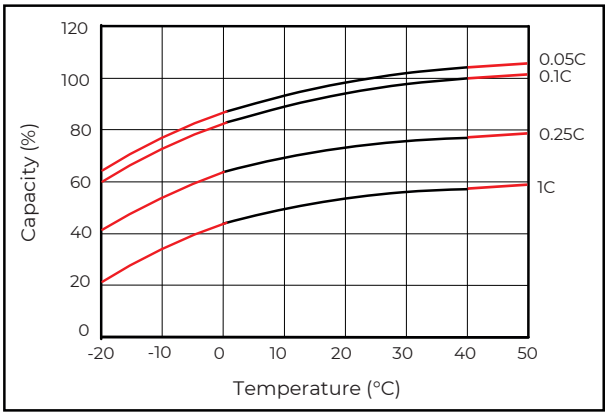


Self-discharge characteristics

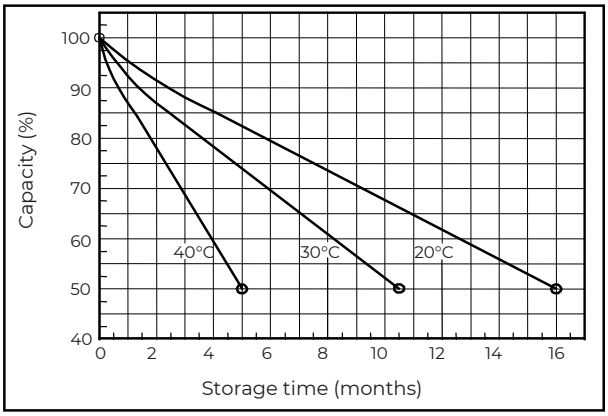


Floating life on temperature

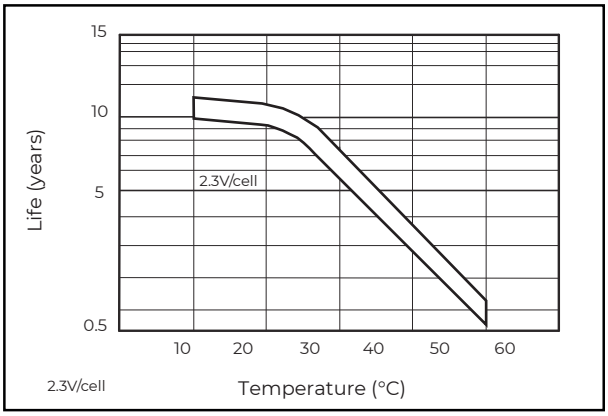


Cycle life on D.O.D (25°C)

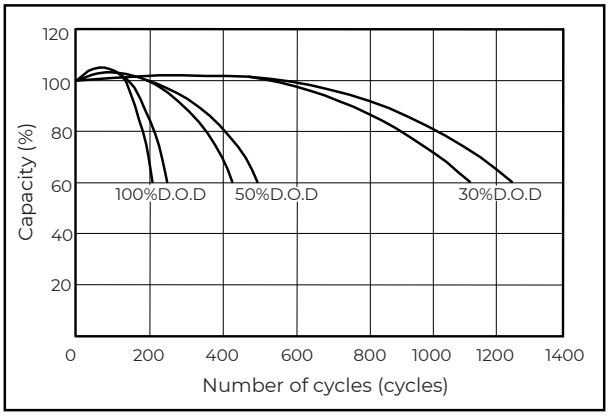

Relationship for OCV and capacity (25°C)

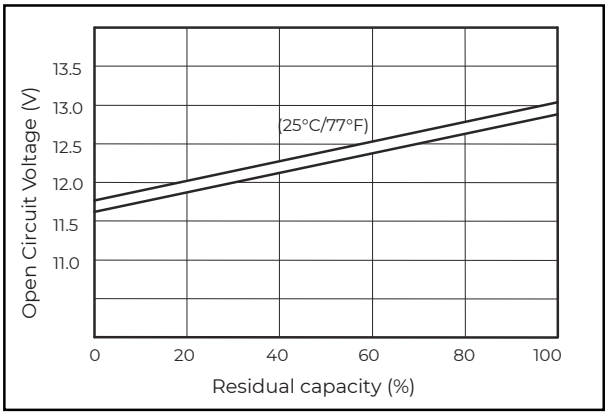

Charging voltage VS temperature

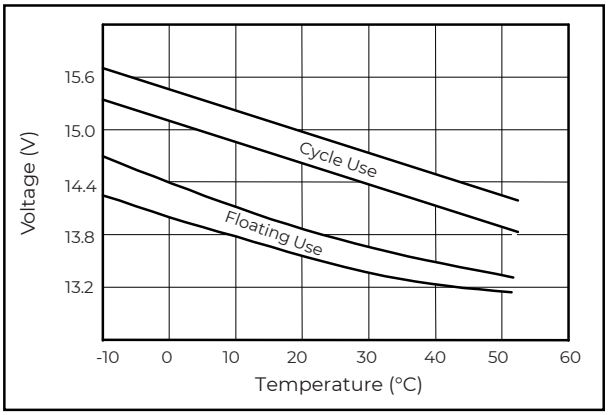

Copyright © 2022 Guangzhou NPP Power Co., Ltd. All rights reserved.