VOLTEC

SOLAR STREET LIGHT

8900

ANTI UV ABS



600 W

ITEM NO	LM	INSTALLATION HEIGHT	T (Kelvin) 6500K 4000K 3000K	SOLAR PANEL	WORKING HOUR	DIMENSIONS (mm)
8900-600W	140LM/W	UPTO 6 METERS		25W/6V	HOURS10-12	597 *342 *70

CHARGING TIME	T(C)	IP	BEAM ABGLE	LIMETIME (h)	SWITCHING CYCLE	BODY	BATTERY	WARRANTY
5-6HOURS	-20~60℃	IP65	120°	30,000	15,000	ANTI UV ABS	24Ah/3.2V	3YEARS


800 W

ITEM NO	LM	INSTALLATION HEIGHT	T (Kelvin) 6500K 4000K 3000K	SOLAR PANEL	WORKING HOUR	DIMENSIONS (mm)
SU-PM 400W	140LM/W	UPTO 6 METERS		30W/6V	HOURS10-12	677 *342 *70

CHARGING TIME	T(C)	IP	BEAM ABGLE	LIMETIME (h)	SWITCHING CYCLE	BODY	BATTERY	WARRANTY
5-6HOURS	-20~60℃	IP65	120°	30,000	15,000	ANTI UV ABS	28Ah/3.2V	3YEARS

VOLTEC



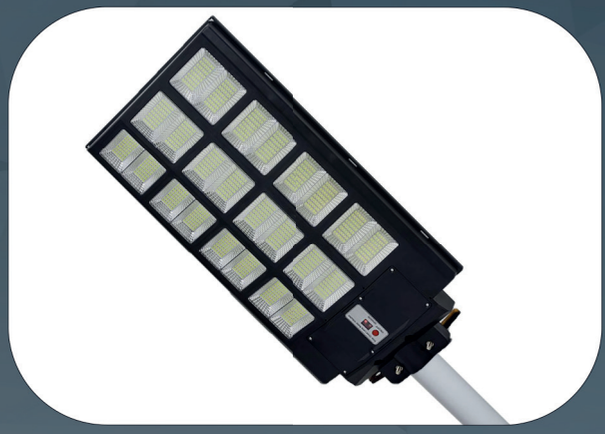


Description:

SOLAR STREET LIGHT

Main material:

DIE-CASTING
ALUMINIUM

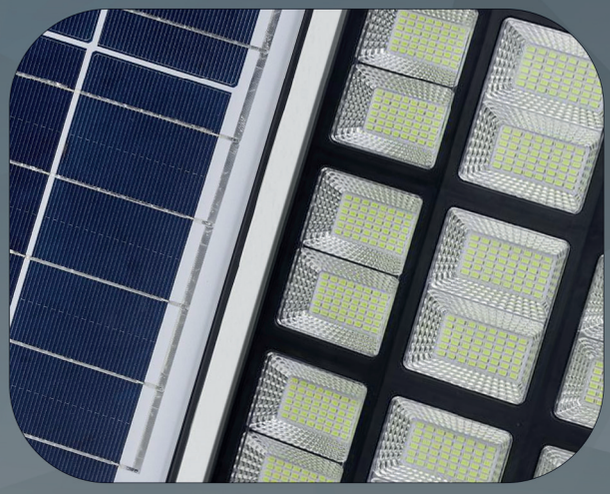


Specification

UPTO 85% ENERGY SAVING
HIGH COLOR RENDERING
HIGH HEAT DISSIPITATION MECHANISM
HIGH QUALITY
IP65

Applications

PETROLEUM STATIONS -LED FLOOD LIGHT
LED GARDEN LIGHTS - LED STREET LIGHT
LED TUNNEL LIGHT

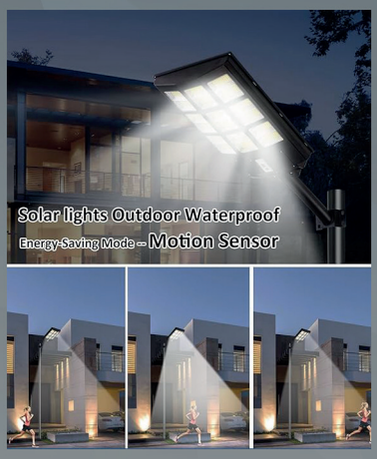





VOLTEC

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

